



TOP OF COVER

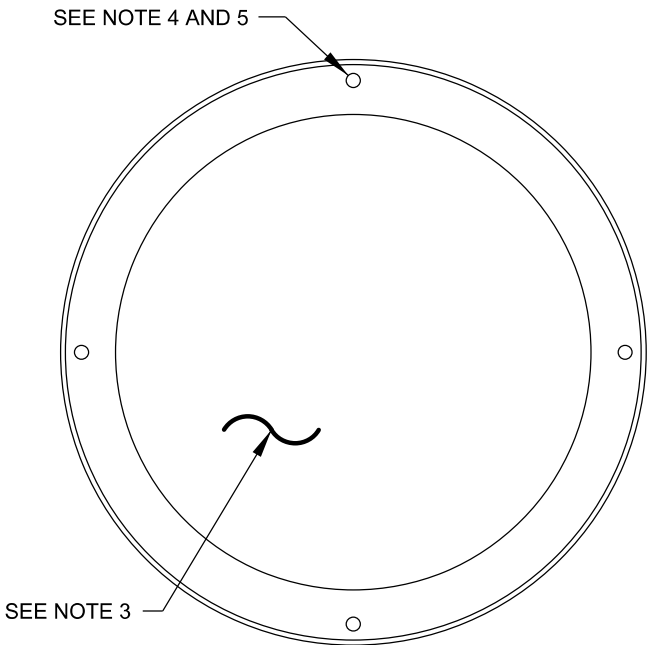

BOTTOM OF COVER

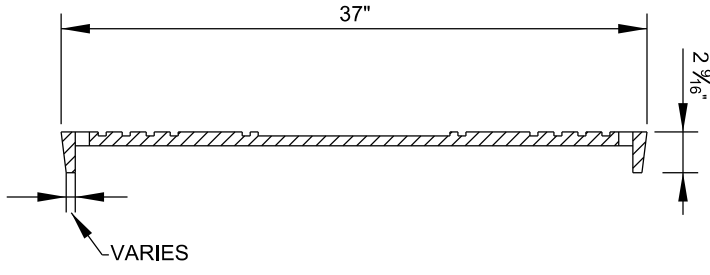

SECTION A-A

NOTES:

1. MANHOLE COVER TO BE TRAFFIC RATED AASHTO M306.
2. MANHOLE SHALL BE GRAY IRON ASTM A48- CLASS 308 MIN.
3. COVER BOTTOM SHALL BE EITHER:
 - A. INTERNAL WEBBING/RIBBING. OR
 - B. FLAT PLATE BOTTOM WITH A MINIMUM OF 3 CLIPS TO ALLOW FOR STACKING/STORAGE OF COVERS
4. (4) PICK HOLES. HOLES CAN BE LOCATED IN THE EXTERIOR FLANGE OR WITHIN THE FLAT PLATE BOTTOM.
5. PICK HOLE DIAMETER SHALL BE 7/8" OR 1".
6. PROVIDE MATCHING CHAMFER TAPER BETWEEN CONDUIT MANHOLE FRAME AND COVER.
7. FOR TRANSIT AND TRAFFIC MANHOLES COVERS CHANGE THE LETTERS DOT TO DTT.



APPROVED :
Ola Olamide
 CHIEF, CONDUIT DIVISION
Hansen Raza
 DIRECTOR, DEPARTMENT OF TRANSPORTATION

CITY OF BALTIMORE
 DEPARTMENT OF TRANSPORTATION
 CONDUIT DIVISION

**MANHOLE - CONDUIT
 STANDARD 37" COVER**

ISSUED	REVISED	REVISED
08/2024		

STANDARD NO.
 BC 825.14-01

SCALE : NONE SHEET 1 OF 1